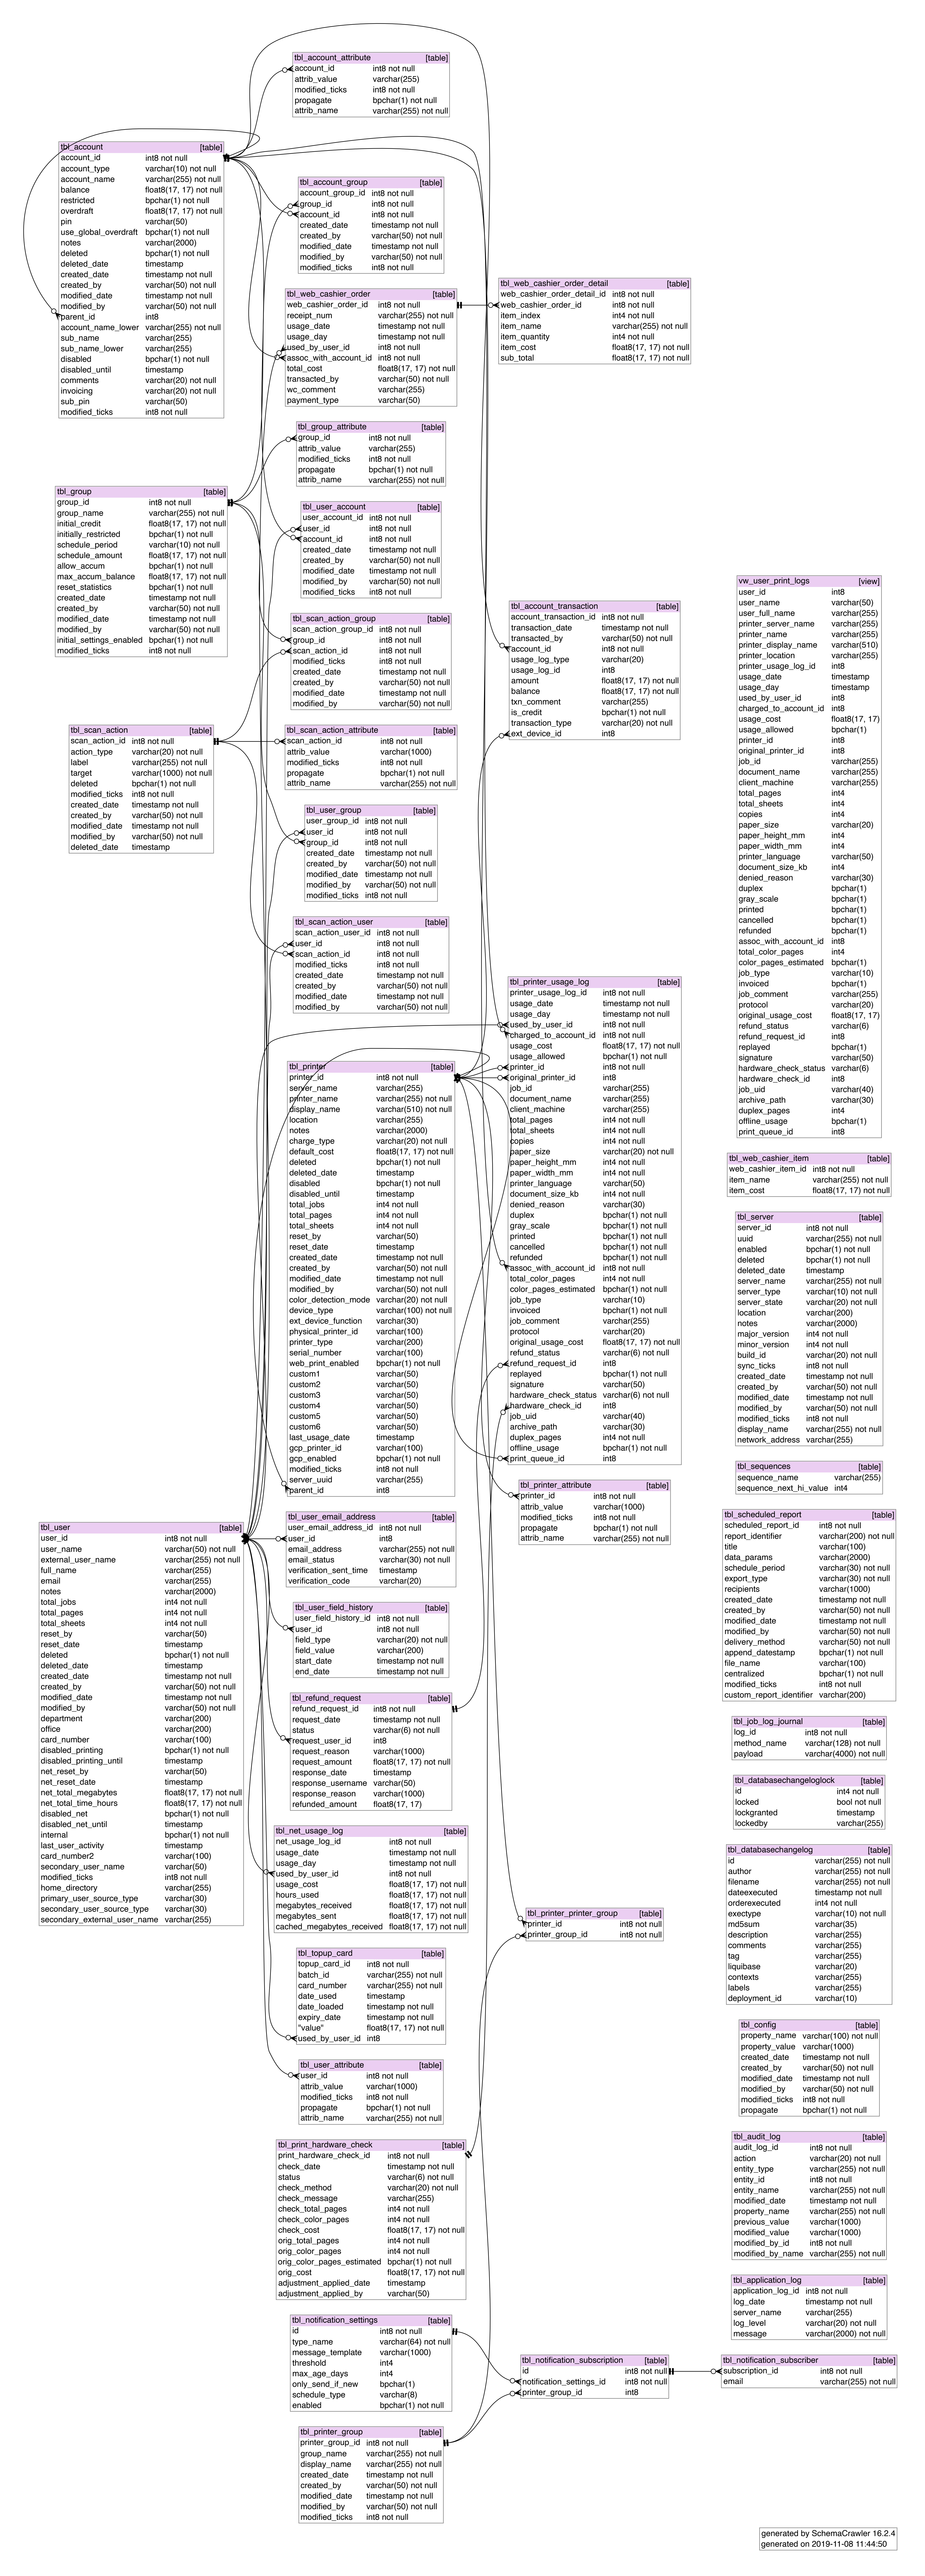
tbl_account_attribute [table]
account_id int8 not null
attrib_value varchar(255)
modified_ticks int8 not null
propagate bpchar(1) not null
attrib_name varchar(255) not null
tbl_account [table]
account_id int8 not null
account_type varchar(10) not null
account_name varchar(255) not null
balance float8(17, 17) not null
restricted bpchar(1) not null
overdraft float8(17, 17) not null
pin varchar(50)
use_global_overdraft bpchar(1) not null
notes varchar(2000)
deleted bpchar(1) not null
deleted_date timestamp
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
parent_id int8
account_name_lower varchar(255) not null
sub_name varchar(255)
sub_name_lower varchar(255)
disabled bpchar(1) not null
disabled_until timestamp
comments varchar(20) not null
invoicing varchar(20) not null
sub_pin varchar(50)
modified_ticks int8 not null
tbl_account_group [table]
account_group_id int8 not null
group_id int8 not null
account_id int8 not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
modified_ticks int8 not null
tbl_web_cashier_order [table]
web_cashier_order_id int8 not null
receipt_num varchar(255) not null
usage_date timestamp not null
usage_day timestamp not null
used_by_user_id int8 not null
assoc_with_account_id int8 not null
total_cost float8(17, 17) not null
transacted_by varchar(50) not null
wc_comment varchar(255)
payment_type varchar(50)
tbl_web_cashier_order_detail [table]
web_cashier_order_detail_id int8 not null
web_cashier_order_id int8 not null
item_index int4 not null
item_name varchar(255) not null
item_quantity int4 not null
item_cost float8(17, 17) not null
sub_total float8(17, 17) not null
tbl_group_attribute [table]
group_id int8 not null
attrib_value varchar(255)
modified_ticks int8 not null
propagate bpchar(1) not null
attrib_name varchar(255) not null
tbl_group [table]
group_id int8 not null
group_name varchar(255) not null
initial_credit float8(17, 17) not null
initially_restricted bpchar(1) not null
schedule_period varchar(10) not null
schedule_amount float8(17, 17) not null
allow_accum bpchar(1) not null
max_accum_balance float8(17, 17) not null
reset_statistics bpchar(1) not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
initial_settings_enabled bpchar(1) not null
modified_ticks int8 not null
tbl_user_account [table]
user_account_id int8 not null
user_id int8 not null
account_id int8 not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
modified_ticks int8 not null
tbl_account_transaction [table]
account_transaction_id int8 not null
transaction_date timestamp not null
transacted_by varchar(50) not null
account_id int8 not null
usage_log_type varchar(20)
usage_log_id int8
amount float8(17, 17) not null
balance float8(17, 17) not null
txn_comment varchar(255)
is_credit bpchar(1) not null
transaction_type varchar(20) not null
ext_device_id int8
vw_user_print_logs [view]
user_id int8
user_name varchar(50)
user_full_name varchar(255)
printer_server_name varchar(255)
printer_name varchar(255)
printer_display_name varchar(510)
printer_location varchar(255)
printer_usage_log_id int8
usage_date timestamp
usage_day timestamp
used_by_user_id int8
charged_to_account_id int8
usage_cost float8(17, 17)
usage_allowed bpchar(1)
printer_id int8
job_id varchar(255)
document_name varchar(255)
client_machine varchar(255)
total_pages int4
total_sheets int4
copies int4
paper_size varchar(20)
paper_height_mm int4
paper_width_mm int4
printer_language varchar(50)
document_size_kb int4
denied_reason varchar(30)
duplex bpchar(1)
gray_scale bpchar(1)
printed bpchar(1)
cancelled bpchar(1)
refunded bpchar(1)
assoc_with_account_id int8
total_color_pages int4
protocol varchar(20)
original_usage_cost float8(17, 17)
refund_status varchar(6)
refund_request_id int8
replayed bpchar(1)
signature varchar(50)
hardware_check_status varchar(6)
hardware_check_id int8
job_uid varchar(40)
archive_path varchar(30)
duplex_pages int4
offline_usage bpchar(1)
print_queue_id int8
tbl_scan_action_group [table]
scan_action_group_id int8 not null
group_id int8 not null
scan_action_id int8 not null
modified_ticks int8 not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
tbl_scan_action [table]
scan_action_id int8 not null
action_type varchar(20) not null
label varchar(255) not null
target varchar(1000) not null
deleted bpchar(1) not null
modified_ticks int8 not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
deleted_date timestamp
tbl_scan_action_attribute [table]
scan_action_id int8 not null
attrib_value varchar(1000)
modified_ticks int8 not null
propagate bpchar(1) not null
attrib_name varchar(255) not null
tbl_user_group [table]
user_group_id int8 not null
user_id int8 not null
group_id int8 not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
modified_ticks int8 not null
tbl_scan_action_user [table]
scan_action_user_id int8 not null
user_id int8 not null
scan_action_id int8 not null
modified_ticks int8 not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
tbl_printer_usage_log [table]
printer_usage_log_id int8 not null
usage_date timestamp not null
usage_day timestamp not null
used_by_user_id int8 not null
charged_to_account_id int8 not null
usage_cost float8(17, 17) not null
usage_allowed bpchar(1) not null
printer_id int8 not null
original_printer_id int8
job_id varchar(255)
document_name varchar(255)
client_machine varchar(255)
total_pages int4 not null
total_sheets int4 not null
copies int4 not null
paper_size varchar(20) not null
paper_height_mm int4 not null
paper_width_mm int4 not null
printer_language varchar(50)
document_size_kb int4 not null
denied_reason varchar(30)
duplex bpchar(1) not null
gray_scale bpchar(1) not null
printed bpchar(1) not null
cancelled bpchar(1) not null
refunded bpchar(1) not null
assoc_with_account_id int8 not null
total_color_pages int4 not null
color_pages_estimated bpchar(1) not null
job_type varchar(10)
invoiced bpchar(1) not null
job_comment varchar(255)
protocol varchar(20)
original_usage_cost float8(17, 17) not null
refund_status varchar(6) not null
refund_request_id int8
replayed bpchar(1) not null
signature varchar(50)
hardware_check_status varchar(6) not null
hardware_check_id int8
job_uid varchar(40)
archive_path varchar(30)
duplex_pages int4 not null
offline_usage bpchar(1) not null
print_queue_id int8
tbl_printer [table]
printer_id int8 not null
server_name varchar(255)
printer_name varchar(255) not null
display_name varchar(510) not null
location varchar(255)
notes varchar(2000)
charge_type varchar(20) not null
default_cost float8(17, 17) not null
deleted bpchar(1) not null
deleted_date timestamp
disabled bpchar(1) not null
disabled_until timestamp
total_jobs int4 not null
total_pages int4 not null
total_sheets int4 not null
reset_by varchar(50)
reset_date timestamp
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
color_detection_mode varchar(20) not null
device_type varchar(100) not null
ext_device_function varchar(30)
physical_printer_id varchar(100)
printer_type varchar(200)
serial_number varchar(100)
web_print_enabled bpchar(1) not null
custom1 varchar(50)
custom2 varchar(50)
custom3 varchar(50)
custom4 varchar(50)
custom5 varchar(50)
custom6 varchar(50)
last_usage_date timestamp
gcp_printer_id varchar(100)
gcp_enabled bpchar(1) not null
modified_ticks int8 not null
server_uuid varchar(255)
parent_id int8
tbl_printer_attribute [table]
printer_id int8 not null
attrib_value varchar(1000)
modified_ticks int8 not null
propagate bpchar(1) not null
attrib_name varchar(255) not null
tbl_web_cashier_item [table]
web_cashier_item_id int8 not null
item_name varchar(255) not null
item_cost float8(17, 17) not null
tbl_server [table]
server_id int8 not null
uuid varchar(255) not null
enabled bpchar(1) not null
deleted bpchar(1) not null
deleted_date timestamp
server_name varchar(255) not null
server_type varchar(10) not null
server_state varchar(20) not null
location varchar(200)
notes varchar(2000)
major_version int4 not null
minor_version int4 not null
build_id varchar(20) not null
sync_ticks int8 not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
modified_ticks int8 not null
display_name varchar(255) not null
network_address varchar(255)
tbl_sequences [table]
sequence_name varchar(255)
sequence_next_hi_value int4
tbl_user [table]
user_id int8 not null
user_name varchar(50) not null
external_user_name varchar(255) not null
full_name varchar(255)
email varchar(255)
notes varchar(2000)
total_jobs int4 not null
total_pages int4 not null
total_sheets int4 not null
reset_by varchar(50)
reset_date timestamp
deleted bpchar(1) not null
deleted_date timestamp
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
department varchar(200)
office varchar(200)
card_number varchar(100)
disabled_printing bpchar(1) not null
disabled_printing_until timestamp
net_reset_by varchar(50)
net_reset_date timestamp
net_total_megabytes float8(17, 17) not null
net_total_time_hours float8(17, 17) not null
disabled_net bpchar(1) not null
disabled_net_until timestamp
internal bpchar(1) not null
last_user_activity timestamp
card_number2 varchar(100)
secondary_user_name varchar(50)
modified_ticks int8 not null
home_directory varchar(255)
primary_user_source_type varchar(30)
secondary_user_source_type varchar(30)
secondary_external_user_name varchar(255)
tbl_user_email_address [table]
user_email_address_id int8 not null
user_id int8
email_address varchar(255) not null
email_status varchar(30) not null
verification_sent_time timestamp
verification_code varchar(20)
tbl_user_field_history [table]
user_field_history_id int8 not null
user_id int8 not null
field_type varchar(20) not null
field_value varchar(200)
start_date timestamp not null
end_date timestamp not null
tbl_refund_request [table]
refund_request_id int8 not null
request_date timestamp not null
status varchar(6) not null
request_user_id int8
request_reason varchar(1000)
request_amount float8(17, 17) not null
response_date timestamp
response_username varchar(50)
response_reason varchar(1000)
refunded_amount float8(17, 17)
tbl_net_usage_log [table]
net_usage_log_id int8 not null
usage_date timestamp not null
usage_day timestamp not null
used_by_user_id int8 not null
usage_cost float8(17, 17) not null
hours_used float8(17, 17) not null
megabytes_received float8(17, 17) not null
megabytes_sent float8(17, 17) not null
cached_megabytes_received float8(17, 17) not null
tbl_topup_card [table]
topup_card_id int8 not null
batch_id varchar(255) not null
card_number varchar(255) not null
date_used timestamp
date_loaded timestamp not null
expiry_date timestamp not null
"value" float8(17, 17) not null
used_by_user_id int8
tbl_user_attribute [table]
user_id int8 not null
attrib_value varchar(1000)
modified_ticks int8 not null
propagate bpchar(1) not null
attrib_name varchar(255) not null
tbl_printer_printer_group [table]
printer_id int8 not null
printer_group_id int8 not null
tbl_scheduled_report [table]
scheduled_report_id int8 not null
report_identifier varchar(200) not null
title varchar(100)
data_params varchar(2000)
schedule_period varchar(30) not null
export_type varchar(30) not null
recipients varchar(1000)
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
delivery_method varchar(50) not null
append_datestamp bpchar(1) not null
file_name varchar(100)
centralized bpchar(1) not null
modified_ticks int8 not null
custom_report_identifier varchar(200)
tbl_job_log_journal [table]
log_id int8 not null
method_name varchar(128) not null
payload varchar(4000) not null
tbl_databasechangeloglock [table]
id int4 not null
locked bool not null
lockgranted timestamp
lockedby varchar(255)
tbl_databasechangelog [table]
id varchar(255) not null
author varchar(255) not null
filename varchar(255) not null
dateexecuted timestamp not null
orderexecuted int4 not null
exectype varchar(10) not null
md5sum varchar(35)
description varchar(255)
comments varchar(255)
tag varchar(255)
liquibase varchar(20)
contexts varchar(255)
labels varchar(255)
deployment_id varchar(10)
tbl_config [table]
property_name varchar(100) not null
property_value varchar(1000)
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
modified_ticks int8 not null
propagate bpchar(1) not null
tbl_print_hardware_check [table]
print_hardware_check_id int8 not null
check_date timestamp not null
status varchar(6) not null
check_method varchar(20) not null
check_message varchar(255)
check_total_pages int4 not null
check_color_pages int4 not null
check_cost float8(17, 17) not null
orig_total_pages int4 not null
orig_color_pages int4 not null
orig_color_pages_estimated bpchar(1) not null
orig_cost float8(17, 17) not null
adjustment_applied_date timestamp
adjustment_applied_by varchar(50)
tbl_audit_log [table]
audit_log_id int8 not null
action varchar(20) not null
entity_type varchar(255) not null
entity_id int8 not null
entity_name varchar(255) not null
modified_date timestamp not null
property_name varchar(255) not null
previous_value varchar(1000)
modified_value varchar(1000)
modified_by_id int8 not null
modified_by_name varchar(255) not null
tbl_application_log [table]
application_log_id int8 not null
log_date timestamp not null
server_name varchar(255)
log_level varchar(20) not null
message varchar(2000) not null
tbl_notification_settings [table]
id int8 not null
type_name varchar(64) not null
message_template varchar(1000)
threshold int4
max_age_days int4
only_send_if_new bpchar(1)
schedule_type varchar(8)
enabled bpchar(1) not null
tbl_notification_subscription [table]
id int8 not null
notification_settings_id int8 not null
printer_group_id int8
tbl_notification_subscriber [table]
subscription_id int8 not null
email varchar(255) not null
tbl_printer_group [table]
printer_group_id int8 not null
group_name varchar(255) not null
display_name varchar(255) not null
created_date timestamp not null
created_by varchar(50) not null
modified_date timestamp not null
modified_by varchar(50) not null
modified_ticks int8 not null
generated by SchemaCrawler 16.2.4
generated on 2019-11-08 11:44:50